
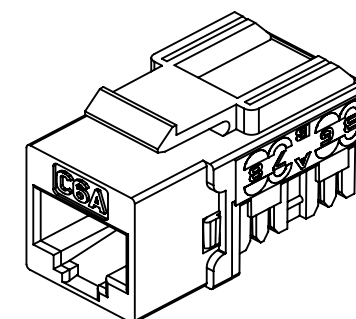


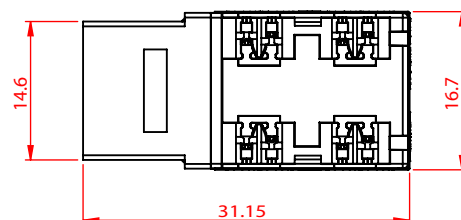

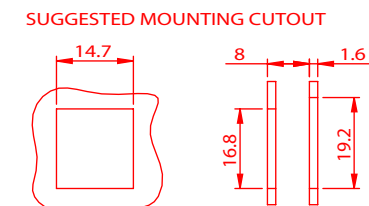


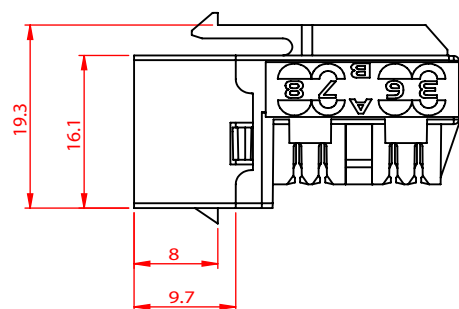




MATERIAL

KEYSTONE JACK HOUSING : ABS, UL94V-0.
JACK CONTACTS : PHOSPHOR BRONZE, 50U" GOLD PLATED.
IDC PLASTIC : PC, UL94V-0.
IDC TERMINALS : PHOSPHOR BRONZE, TIN OVER NICKEL UNDERCOAT.

PHYSICAL CHARACTERISTICS

PHYSICAL CHARACTERISTICS:
 SUITABLE IMPACT TOOL, 15° STYLE PUNCH DOWN TOOL.
 INSERTION AND REMOVAL CYCLES WITH FCC COMPLIANT 8P PLUG.
 PLUG RETENTION FORCE: 1.1 LBF MINIMUM.
 DURABILITY: 200 TERMINATION CYCLES.
 CONTACT COMPATIBILITY: ACCOMMODATES 22 TO 24 AWG SOLID.
 OPERATING TEMPERATURE RANGE: -10 °C to 60 °C.
 STORAGE TEMPERATURE RANGE: -40 °C to 68 °C.
 HUMIDITY: 10% TO 90% RH (NON-CONDENSING).

ELECTRICAL


INSULATION RESISTANCE : 500 MΩ MINIMUM.
DC CURRENT RATING : 1.5 Amps.
INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
CONTACT RESISTANCE : 20 mΩ MAXIMUM.
VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V D.C. OR A.C. PEAK.


NOTE

- ONLY ACCEPT RJ-45 8P8C PLUG.

ENCLOSURE
IDC CAP X 1 PC

Cat 6A

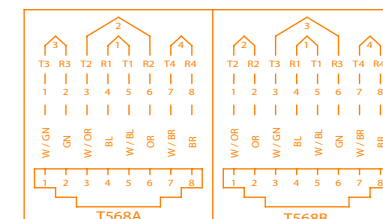

Scale		1:1		All Copy Rights Reserved	
3rd Angle Projection				nFlexon LLC	
Unit		mm		Title Category 6A Keystone Jack KJCT6AXX0010	
Date		2017/2/24			
Tolerance					
~20	~50	~150	150~		
±0.2	±0.4	±0.5	±1.5	±2°	