



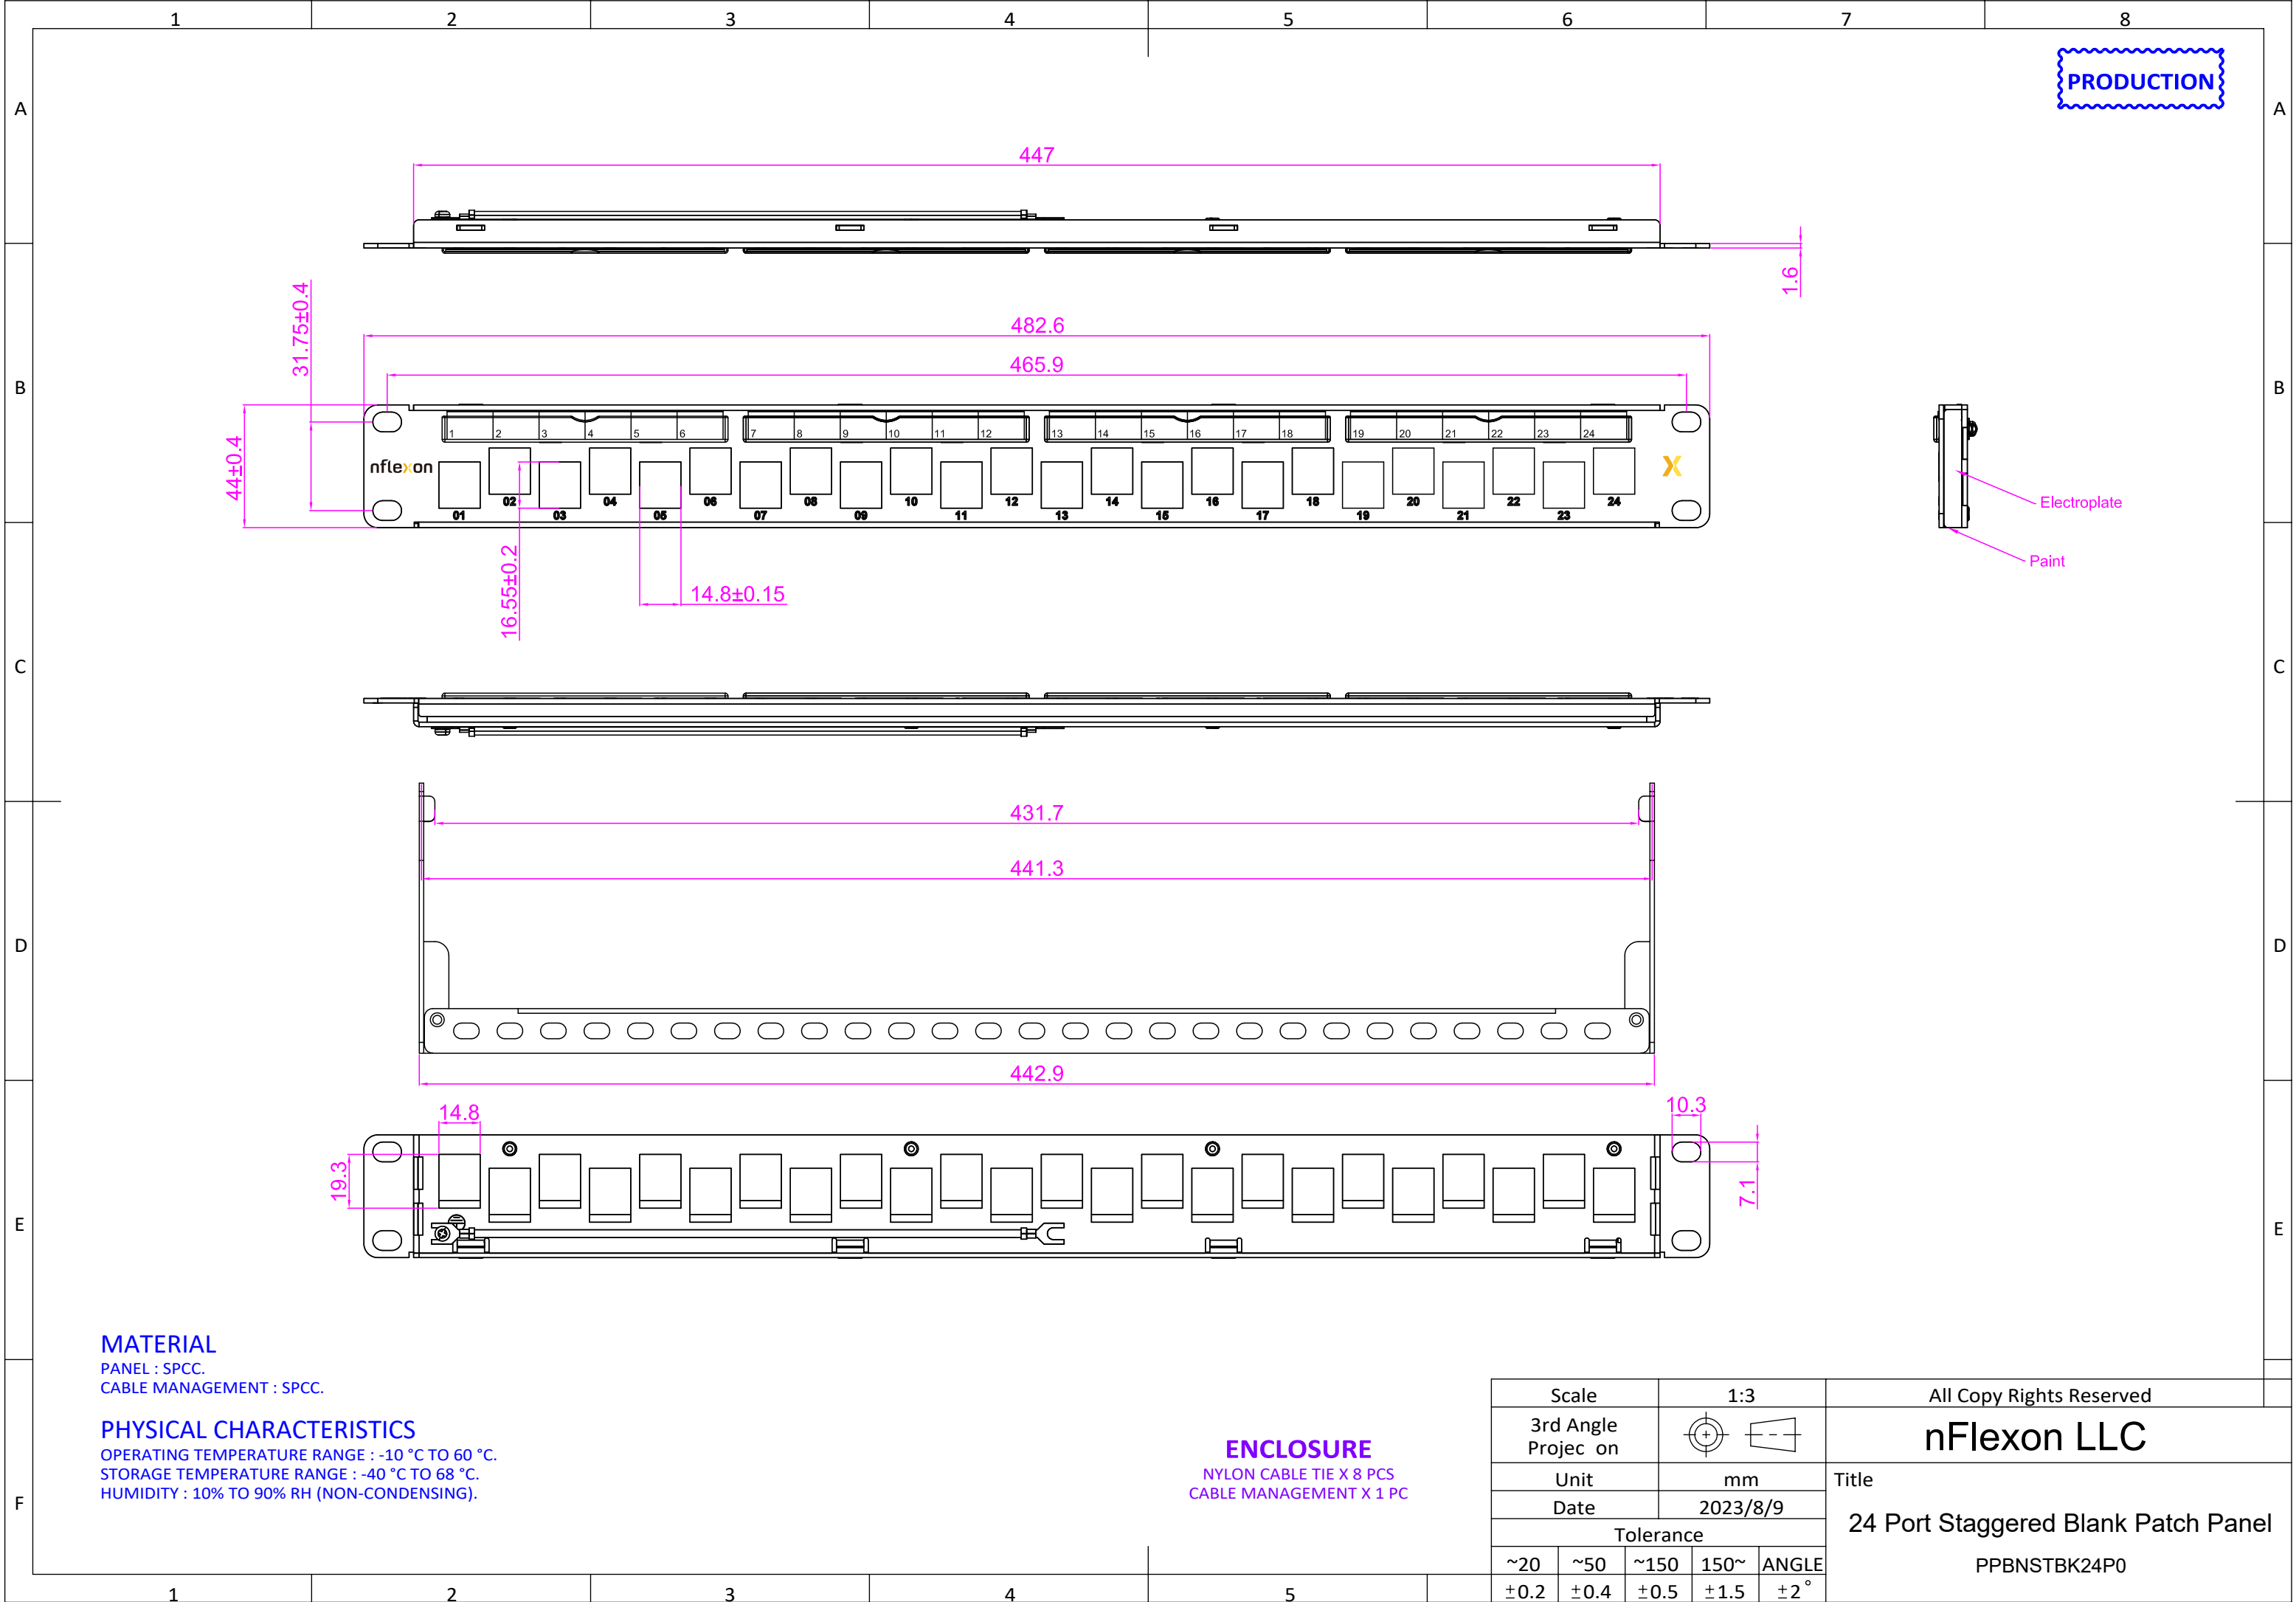

PRODUCTION



MATERIAL

PANEL : SPCC.
CABLE MANAGEMENT : SPCC.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ENCLOSURE
NYLON CABLE TIE X 8 PCS
CABLE MANAGEMENT X 1 PC

Scale		1:3	All Copy Rights Reserved		
3rd Angle Projec on			nFlexon LLC		
Unit		mm			
Date		2023/8/9	Title 24 Port Staggered Blank Patch Panel PPBNSTBK24P0		
		Tolerance			
~20	~50	~150	150~	ANGLE	
±0.2	±0.4	±0.5	±1.5	±2°	