

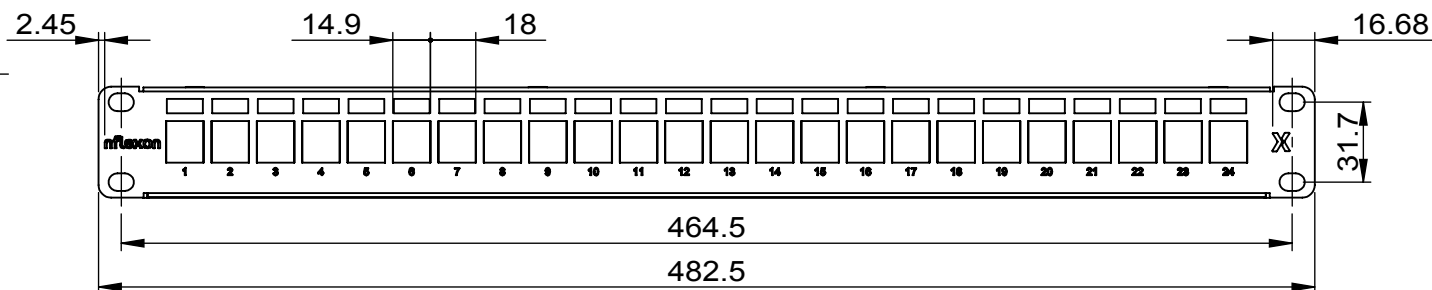
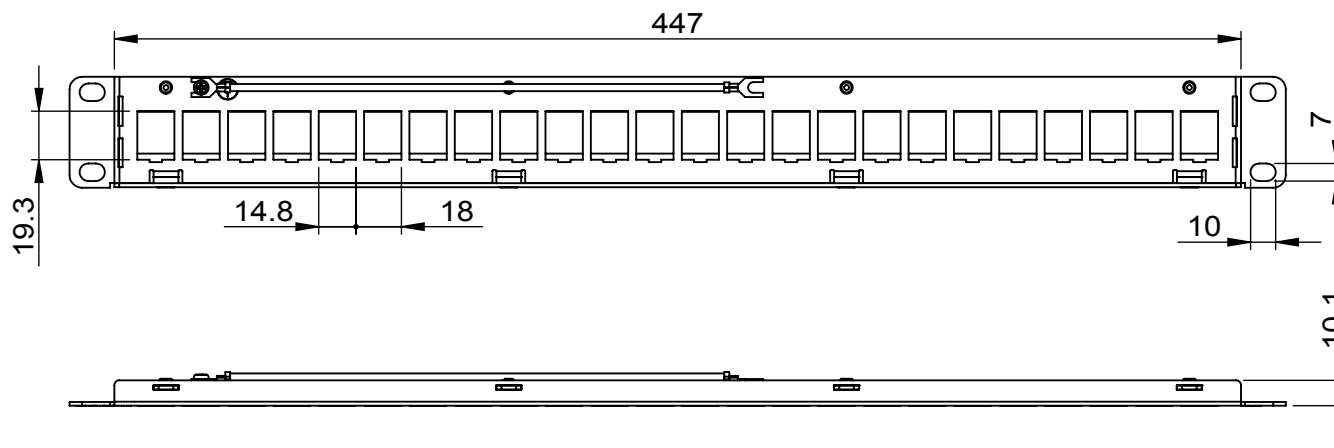


INFORMATIONAL
PURPOSE ONLY

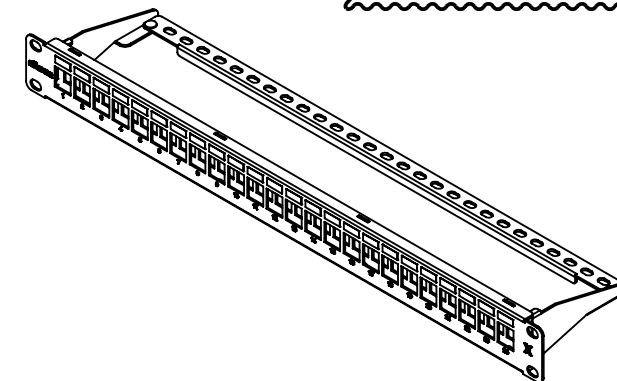

ENCLOSURE

Nylon Cable Tie X 8 PCS
Cable Tie Bar X 1 PC
Instructions X 1 PC

56Y4
E491065



LISTED
COMMUNICATION
CIRCUIT ACCESSORIES




MATERIAL

PANEL-FRONT : SPCC.
PANEL-BACK : SECC.
WIRE MANAGEMENT : SPCC.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
HUMIDITY : 10%~90%RH.

Scale		1:3		All Copy Rights Reserved		
3rd Angle Projection				nFlexon LLC		
Unit		mm		Title 24 Port Straight Blank Patch Panel PPBNSTBK24P0		
Date		2017/3/17				
Tolerance						
~20	~50	~150	150~			ANGLE
±0.2	±0.4	±0.5	±1.5			±2°