



Recessed in square area  
Font in protrusion about 0.35 mm  
Height of Font about 4.3 mm

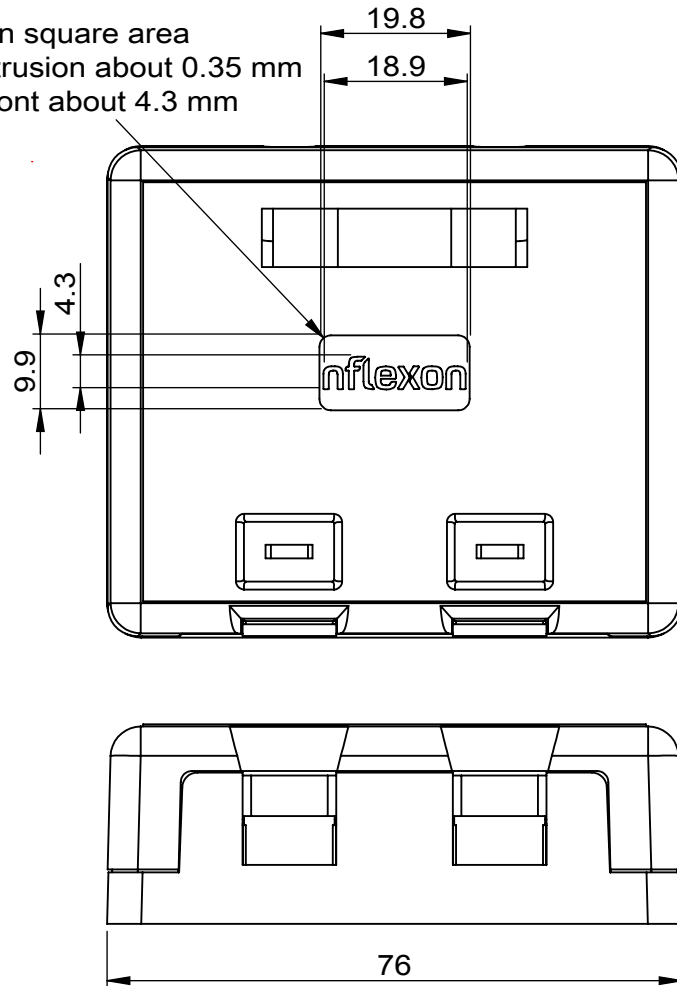

INFORMATIONAL  
PURPOSE ONLY

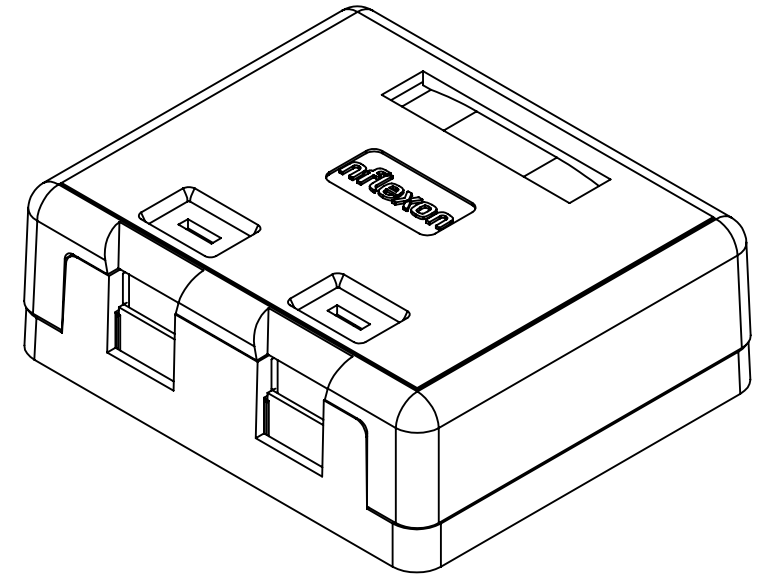

ENCLOSURE  
NYLON CABLE TIE X 2 PCS  
I.D. ICON X 2 PCS(PC)  
I.D. ICON X 2 PCS(TEL)  
I.D. PAPER X 1 PC  
SCREW X 2 PCS  
TRANSPARENT I.D. COVER X 1 PC  
TWIN ADHESIVE X 1 PC

56Y4  
E491065

RoHS



COMMUNICATION  
CIRCUIT ACCESSORIES

## MATERIAL

SPRING : STAINLESS.  
HOUSING : ABS,UL94V-0.  
SHUTTER-UPPER PART : ABS,UL94V-0.  
SHUTTER-LOWER PART : ABS,UL94V-0.

## PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.  
STORAGE TEMPERATURE RANGE : -40°C TO 68°C.  
HUMIDITY : 10%~90%RH.

|                      |      |                                                                                       |      |      |
|----------------------|------|---------------------------------------------------------------------------------------|------|------|
| Scale                |      | 1:1                                                                                   |      |      |
| 3rd Angle Projection |      |  |      |      |
| Unit                 |      | mm                                                                                    |      |      |
| Date                 |      | 2017/2/24                                                                             |      |      |
| Tolerance            |      |                                                                                       |      |      |
| ~20                  | ~50  | ~150                                                                                  | 150~ | ANGL |
| ±0.2                 | ±0.4 | ±0.5                                                                                  | ±1.5 | ±2°  |

All Copy Rights Reserved

nFlexon LLC

Title

2 Port Surface Mount Box  
SMKYSJXX02P0