
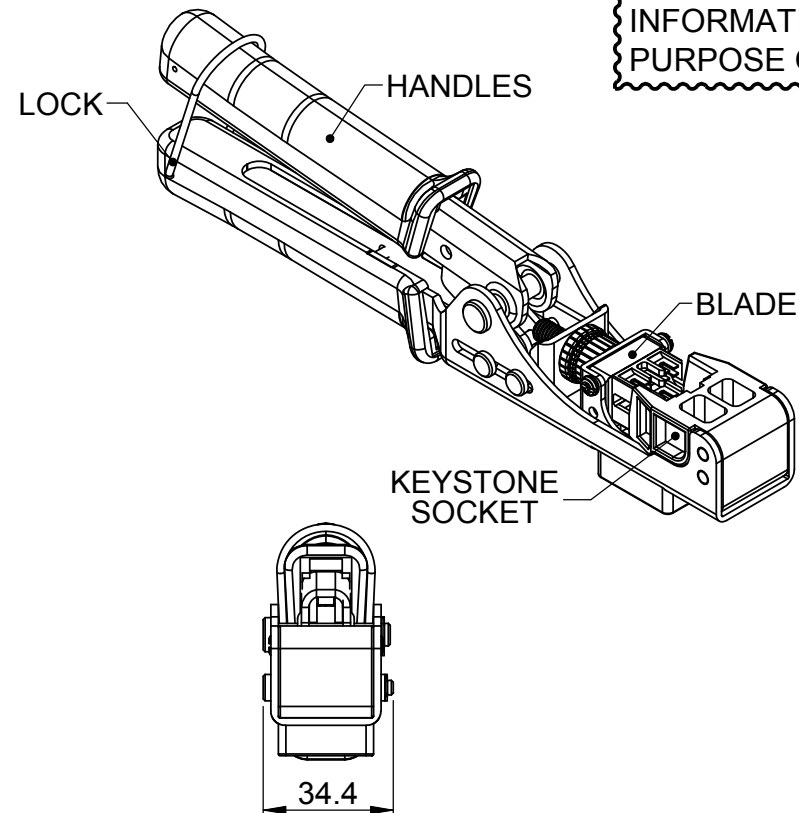
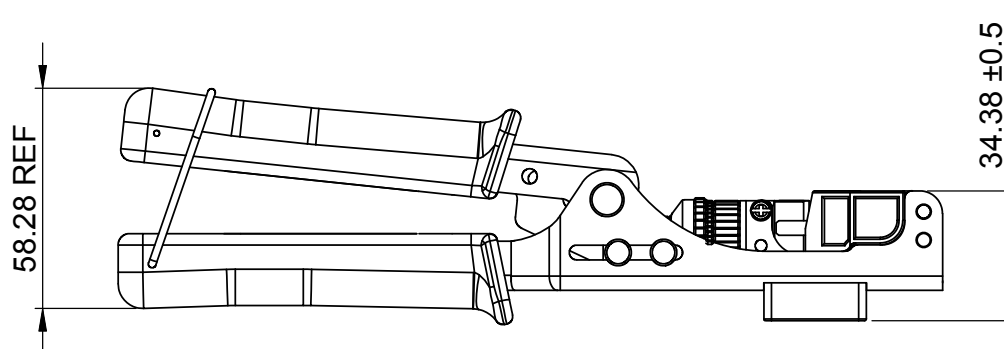


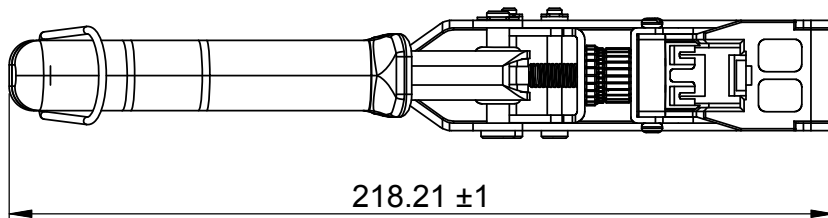

MATERIAL

MAIN BODY : CARBON STEEL.
BLADE : ALLOY STEEL.
FINISHED: BLACK OXIDE FINISHED.
KEYSTONE SOCKET : PC+ABS,UL94V-0.
HANDLES : PVC.
WEIGHT : 380g±20g.
SUITABLE MODEL : QA SERIES.

PHYSICAL CHARACTERISTICS

REPLACEABLE BLADE : 2000 TERMINATION CYCLES.
CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
STORAGE TEMPERATURE RANGE : -15 °C TO 50 °C.
HUMIDITY : 10%~90%RH.

RoHS

56Y4
E491065

UL **us**
LISTED
COMMUNICATION
CIRCUIT ACCESSORIES

Scale		1:2		
3rd Angle Projection				
Unit		mm		
Date		2017/2/24		
Tolerance				
~20	~50	~150	150~	ANGL
±0.2	±0.4	±0.5	±1.5	±2°

All Copy Rights Reserved

nFlexon LLC

Title

Termination Tool

TTKYSJYL0010